



MODEL SV144 E GG22 HCM10

TOPCon technology

Bifacial

585 W

Maximum power output

-0/+4,9 W

Positive power sorting

22,65%

Maximum Efficiency



Premium quality



100% EL testing



Power output range
575-585 W



Mechanical load
up to 5400 Pa*



Low weight



EN IEC 61215-1,-1-1,-2
EN IEC 61730-1,-2



Module efficiency
up to 22,65%



Made in Europe



Transizione 5.0



Made-in-Europe-Bonus

Warranty:





years manufacturing
defects



years limited,
87,4% output power

Module power degradation:

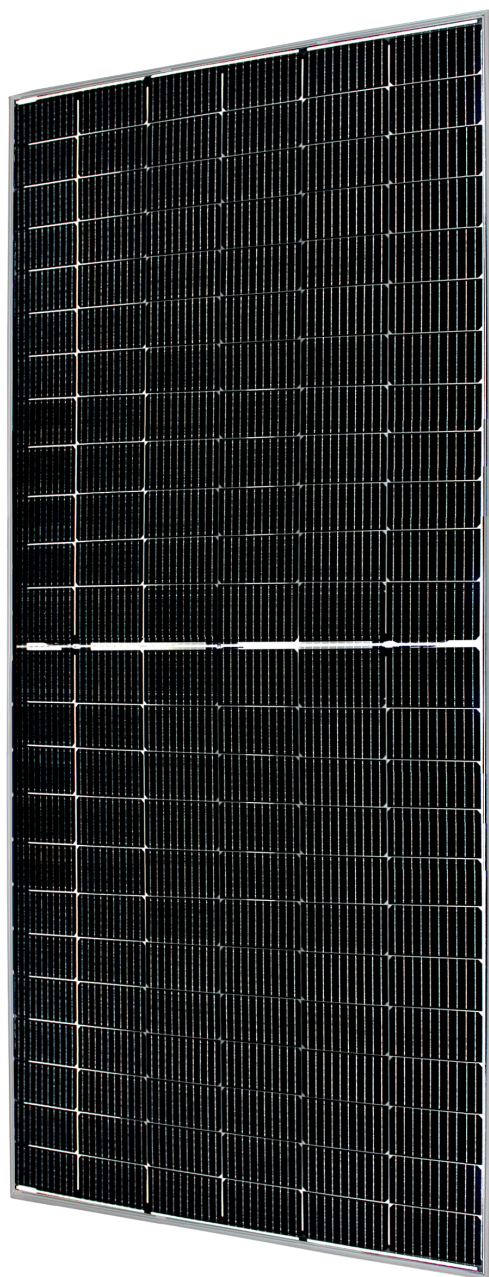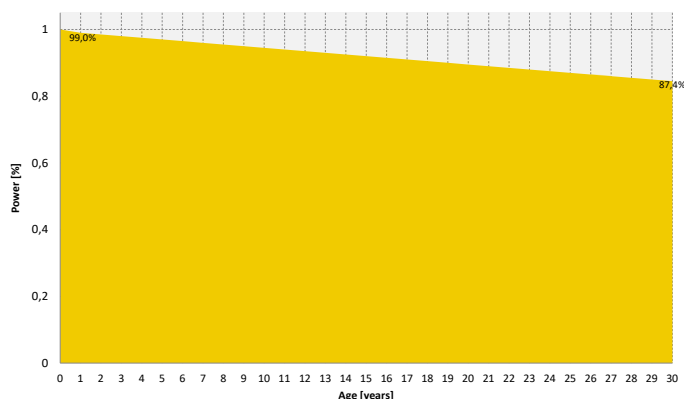

GG22_HCM10_Global_P+_30_20250725

Electrical parameters at Standard Test Conditions (STC)

MODEL		SV144-575 E GG22 HCM10	SV144-580 E GG22 HCM10	SV144-585 E GG22 HCM10
Peak power P_{MPP}	[W]	575	580	585
Peak power sorting	[W]	-0/+4,9		
Short circuit current I_{SC}	[A]	14,44	14,50	14,56
Open circuit voltage V_{OC}	[V]	50,90	51,04	51,16
Rated current I_{MPP}	[A]	13,65	13,71	13,77
Rated voltage V_{MPP}	[V]	42,15	42,33	42,51
Module efficiency	[%]	22,26	22,45	22,65
Cell efficiency	[%]	>24,9	>25,1	>25,4

STC: 1000 W/m² irradiance, 25 °C cell temperature, AM 1,5 g spectrum according to EN 60904-3. Machine measurement tolerance: +/- 3%. Machine measurement rating: AAA. Primary electrical value for product type rating is P_{MPP} . I and V values can vary up to +/- 10% for the same P_{MPP} rating. Average relative efficiency reduction of 3,4% at 200 W/m² according to EN 60904-1.

Electrical parameters at Nominal Module Operating Temperature (NMOT)

MODEL		SV144-575 E GG22 HCM10	SV144-580 E GG22 HCM10	SV144-585 E GG22 HCM10
Peak power P_{MPP}	[W]	435,4	439,2	443,0
Short circuit current I_{SC}	[A]	11,67	11,71	11,76
Open circuit voltage V_{OC}	[V]	48,4	48,5	48,6
Rated current I_{MPP}	[A]	10,86	10,92	10,96
Rated voltage V_{MPP}	[V]	40,1	40,2	40,4

NMOT: module operating parameters at 800 W/m² irradiance, 20 °C ambient temperature, 1 m/s wind speed.

Electrical parameters at Bifacial Name Plate Irradiance (BNPI)

MODEL		SV144-575 E GG22 HCM10	SV144-580 E GG22 HCM10	SV144-585 E GG22 HCM10
Peak power P_{MPP}	[W]	633	638	644
Short circuit current I_{SC}	[A]	16	16,07	16,13
Open circuit voltage V_{OC}	[V]	50,9	51,04	51,16
Rated current I_{MPP}	[A]	15,02	15,07	15,15
Rated voltage V_{MPP}	[V]	42,15	42,33	42,51

MECHANICAL DATA

Dimensions (H x W x D)	[mm]	2278 x 1134 x 35
Weight	[kg]	30,0
Solar cells		TOPCon, 144 cells, mono-Si, 182x91 mm ± 1 mm
Front		AR Coated, Tempered solar glass, 2,0 mm
Back		semi-tempered glass 2,0 mm
Frame		Anodized aluminum frame with twin-wall profile and drainage holes
Junction box		IP68 with 3 Bypass diodes
Cable and connectors		Solar cable 4 mm ² , length 1400 mm, Stäubli MC4/EVO2 connectors

OPERATING CONDITIONS




Temperature range	[°C]	-40 to +85
Maximum system voltage	[V]	1500
Max. series fuse rating	[A]	30
Limiting reverse current	[A]	25
Maximum surface load capacity	[Pa]	Down: 5400* Up: 2400
Resistance against hail		Max. diameter of 25 mm with impact speed 23 m/s

THERMAL CHARACTERISTICS

Temperature coefficient of P_{MPP}	[%/K]	-0,289
Temperature coefficient of I_{SC}	[%/K]	0,045
Temperature coefficient of V_{OC}	[%/K]	-0,244

PACKAGING:

Quantity/Pallet	pcs	31
Truck	pcs	682
Pallets	pcs	22

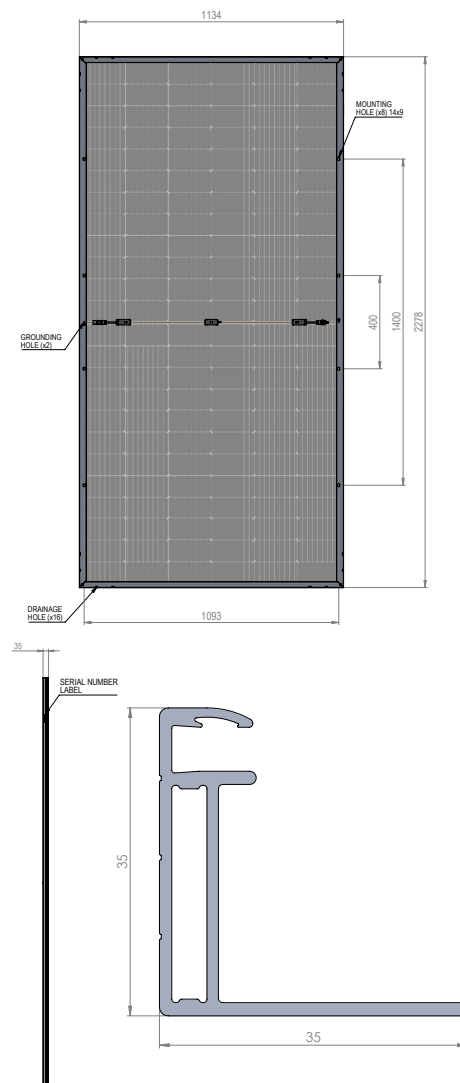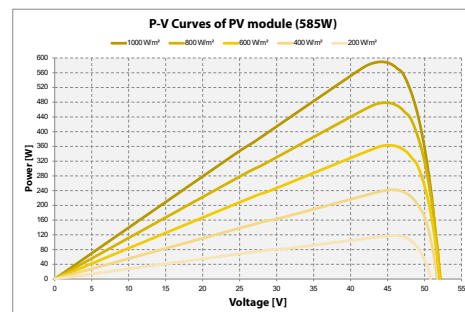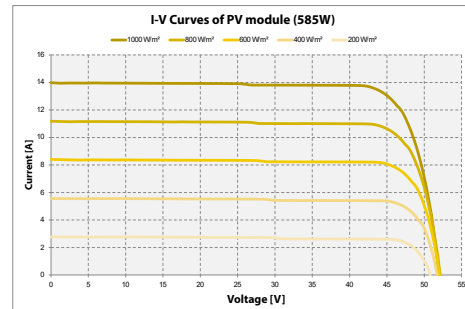

*Please refer to installation manual

